

Wasserdichte Lichtleisten / Waterproof Light Bar




Technical Specification

- Available in full range of single colours and RGB full colour.
- Available in different lengths 0.4 m, 0.5 m, 0.8 m, 1 m single colour and 0.3 m RGB full of colour.
- Working Voltage: 12V DC (RGB tri-colour used 5V DC).
- Working Current: 150 ~ 180 mA (0.4 m, 25-LED)
170 ~ 200 mA (0.5 m, 30-LED)
340 ~ 400 mA (1 m, 60-LED)
- Various choices for viewing angles from 40-120 degrees.
- Low input voltage 12V DC or 5V DC.
- Totally waterproof.

APPLICATIONS

- Backlighting for larger size ad-sings.
- Elegant interior decoration.
- Nice accent lighting lamps.
- Landscape outlines, etc.
- Signal lighting.

SMD Waterproof Light Bar

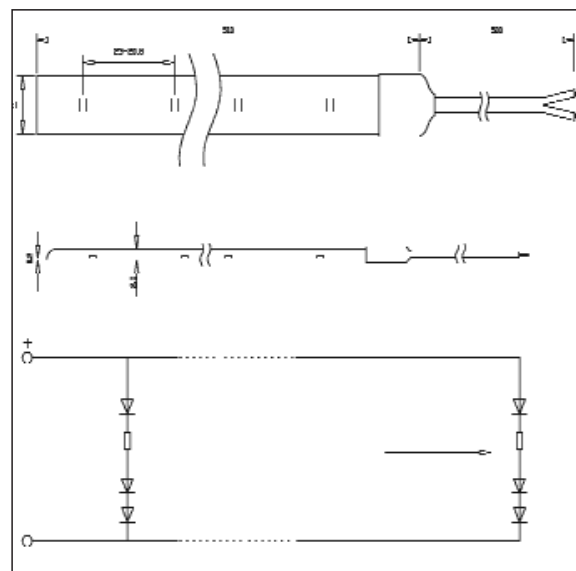

Through-hole Waterproof Light Ribbon

