


PRODUKT-INFO

CPX-84 SMD CRYSTAL


ELECTRICAL SPECIFICATIONS	
Model	CPX-84
Frequency Range	6.0 MHz ~ 100.0 MHz
Frequency Tolerance (at +25°C)	±30 ppm / ±50 ppm / ±100 ppm
Frequency Stability	±30 ppm / ±50 ppm / ±100 ppm
Operating Temperature Range	-20°C to +70°C, -40°C to +85°C option
Equivalent Series Resistance and Oscillation Mode	6.0 ~ 9.999 MHz 120 Ω max. Fundamental 10.0 ~ 11.999 MHz 80 Ω max. Fundamental 12.0 ~ 39.999 MHz 50 Ω max. Fundamental 40.0 ~ 100.0 MHz 70 Ω max. 3rd Overtone
Load Capacitance (C_L)	10 pF ~ Series (Customer Spec.)
Shunt Capacitance	7 pF max.
Drive Level	100 μW (300 μW max.)
Shock	allowed to fall freely onto the hard wooden board from height of 75 cm
Vibration	10.0 Hz – 55.0 Hz, Amplitude 1,5 mm, applied for 30 min. in 3D (X, Y, Z)
Aging (at +25°C) first year	±5 ppm / year max.




Actual Size



Dimensions (Units: mm)

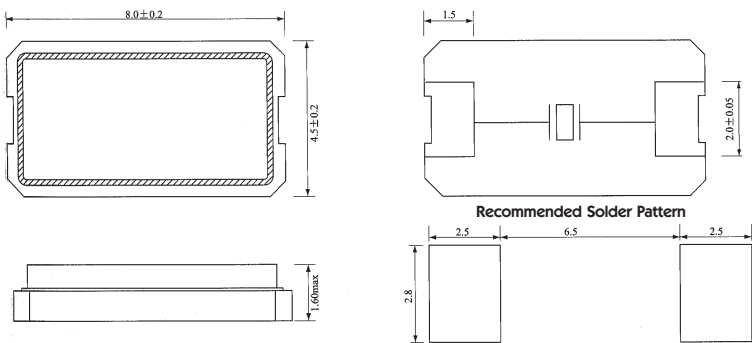

8.0 x 4.5 x 1.6




No. Parts

- ① Base
- ② Glass
- ③ Cap
- ④ Crystal Unit
- ⑤ Conductive Adhesive
- ⑥ Electrode

Materials

- Ceramics
- Low Temperature Glass
- Ceramics
- Silver-Filled Au

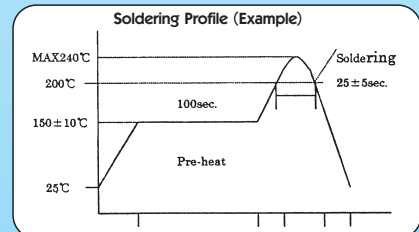

Resistance to Moisture	Test Condition
	Temperature +60°C (± 2 °C)
	Humidity 90 ~ 95 %
	Time 500 h
Soldering Conditions	Material of Solder
Kind	Eutectic solder paste
Melting point	180°C (±5 °C)
Temp. profile of reflow soldering system	
Peak 240°C (± 5 °C)	10 sec.
Preheating 150°C, typical	100 sec. typical
Total	200 sec. max.

*Crystals...
and more*

Now available

RoHS
COMPLIANT
2002/95/EC



digital electronic
siegfried lehrer gmbh
Bulbesheimer Str. 5
D-89340 Leipheim (Germany)
www.digitallehrer.de
digital@digitallehrer.de

Telefon 0 82 21 / 7 08 - 0 · Telefax 0 82 21 / 7 08 - 80

All specifications subject to change without notice.