**MK12C02 series**
N NON-SHORTING


Rating: 0.3A 6V DC

Travel: 1.5 mm

Function: 1P2T

Operating Force: 200gf ± 100gf

Initial Contact Resistance: 70mΩ MAX



| MODEL        | Ground Terminal | Knob Thickness, mm | Tape & Reel Option |
|--------------|-----------------|--------------------|--------------------|
| MK-12-C02-PA | With            | 0.4                | Yes                |
| MK-12-C02-PB | With            | 1.1                | Yes                |
| MK-12-C02-NA | Without         | 0.4                | Yes                |
| MK-12-C02-NB | Without         | 1.1                | Yes                |

**MK12D05**
S SHORTING


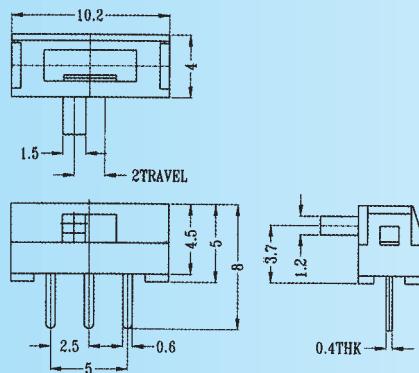

Rating: 0.3A 6V DC

Travel: 2 mm

Function: 1P2T

Operating Force: 200gf ± 100gf

Initial Contact Resistance: 70mΩ MAX

**MK12D13 series**
N NON-SHORTING

Rating: 0.3A 6V DC

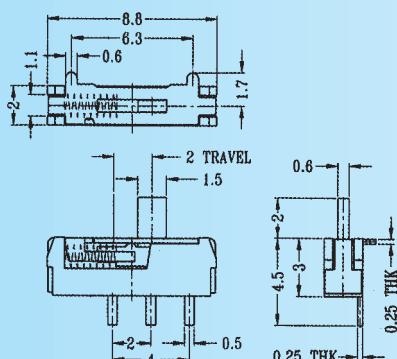

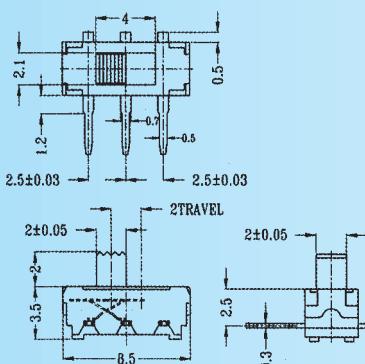

Travel: 2 mm

Function: 1P2T

Operating Force: 250gf ± 150gf

Initial Contact Resistance: 70mΩ MAX

| MODEL    | Knob Thickness, mm |
|----------|--------------------|
| MK-12D13 | 2                  |
| MK-12D14 | 4                  |

**MK12D70-E series**
N NON-SHORTING


Rating: 0.3A 6V DC

Travel: 2 mm


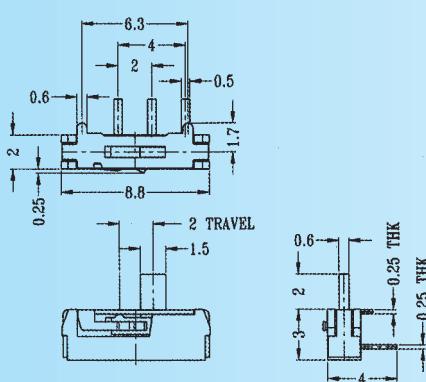
Function: 1P2T

Operating Force: 150gf ± 100gf

Initial Contact Resistance: 70mΩ MAX



| MODEL       | Ground Terminal | Spring Return Function | TERMINAL | Tape & Reel Option |
|-------------|-----------------|------------------------|----------|--------------------|
| MK-12D70-E  | With            | No                     | SMT      | No                 |
| MK-12D70-EN | Without         | No                     | SMT      | No                 |
| MK-12D70-R  | With            | Yes                    | SMT      | No                 |
| MK-12D70-RN | Without         | Yes                    | SMT      | No                 |

**MK12D70-H series**


Rating: 0.3A 6V DC

Travel: 2 mm

Function: 1P2T

Operating Force: 150gf ± 100gf

Initial Contact Resistance: 70mΩ MAX



| MODEL        | Ground Terminal | Spring Return Function | TERMINAL |
|--------------|-----------------|------------------------|----------|
| MK-12D70-H   | With            | No                     | DIP      |
| MK-12D70-HN  | Without         | No                     | DIP      |
| MK-12D70-HR  | With            | Yes                    | DIP      |
| MK-12D70-HRN | Without         | Yes                    | DIP      |