


## CUSTOM-DESIGN LCD PANELS


### YDDT0008AAFH

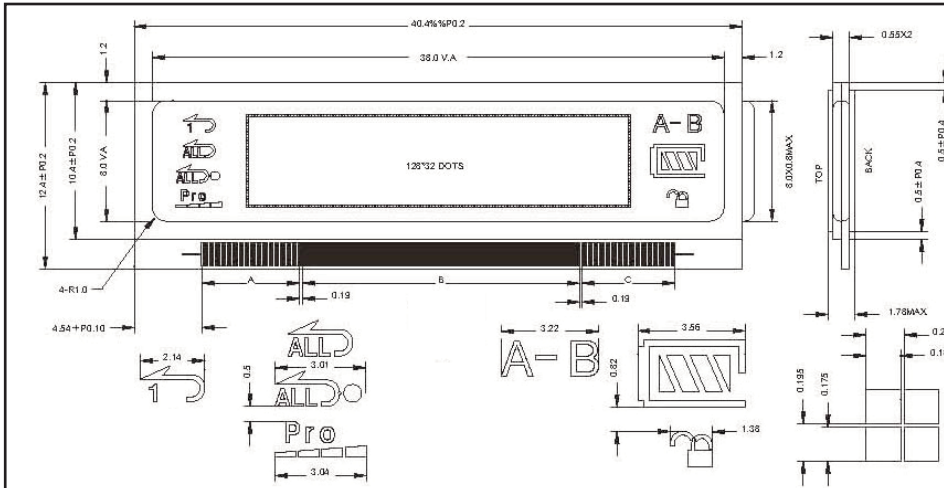

A: Pitch 0.18x36	6.48
B: Pitch 0.14x131	18.34
C: Pitch 0.18x34	6.12


ITEM	SPECIFICATION
LCD Type	FSTN
Display Mode	Positive
Drive Method	9V
Polarizer Type	T/H
Viewing Angle	6:00
Connector	TAB
Operating Temperature	-10°C to 60°C
Storage Temperature	-20°C to 70°C

### YDDT0015AAFH

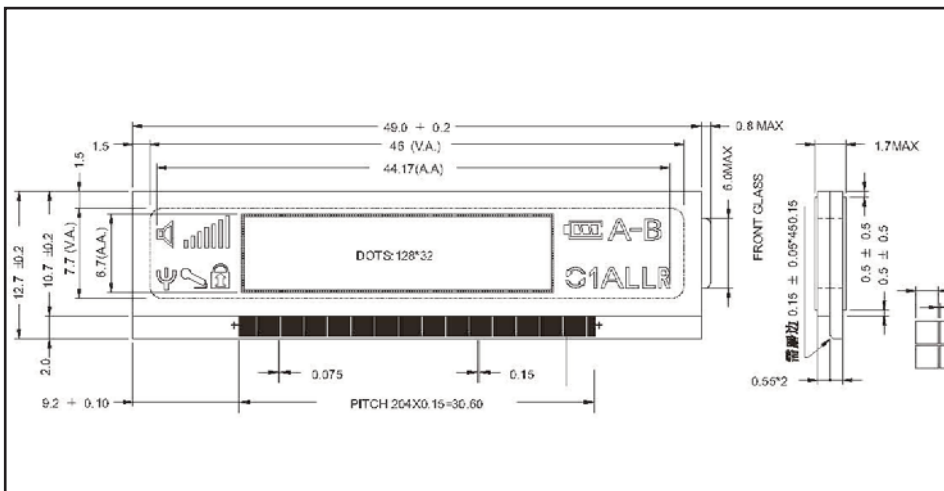

ITEM	SPECIFICATION
LCD Type	FSTN
Display Mode	Positive
Drive Method	9V
Polarizer Type	T/H
Viewing Angle	6:00
Connector	TAB
Operating Temperature	-20°C to 70°C
Storage Temperature	-30°C to 80°C

### YDDC2186AATNZ

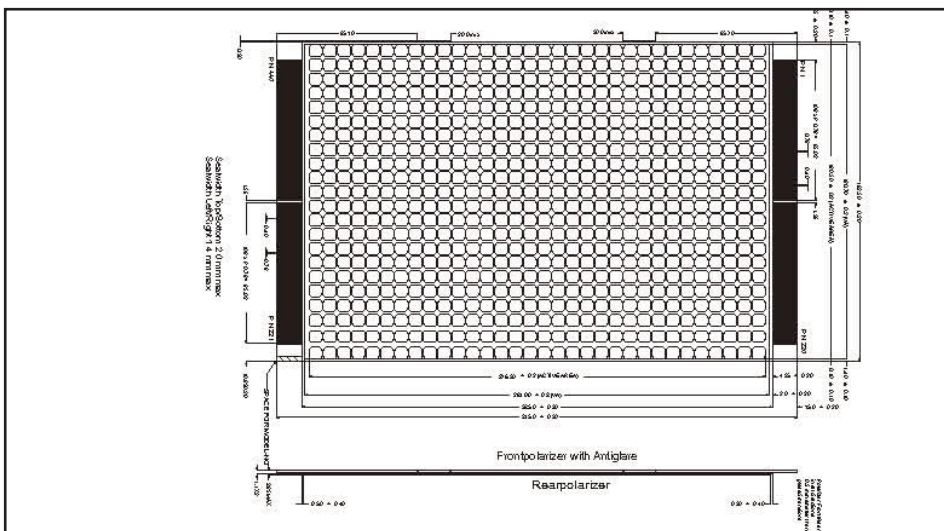

ITEM	SPECIFICATION
LCD Type	TN
Display Mode	Negative
Drive Method	6.5V max.
Polarizer Type	T/T
Viewing Angle	6:00
Connector	Zebra
Operating Temperature	-20°C to 75°C
Storage Temperature	-25°C to 85°C