

PRODUKT-INFO

VCO-705N • VCO-705T

SMD Voltage Controlled Crystal Oscillators

FEATURES

1. Metal cap / ceramic base.
2. Seam welding.

APPLICATION

For ADSL, MPEG, etc.




Actual Size



ELECTRICAL SPECIFICATIONS		VCO-705N	VCO-705T
Model		VCO-705N	VCO-705T
Frequency Range		1.5 MHz ~ 54.0 MHz	
Nominal Frequency		27.0 MHz, 35.328 MHz	
Frequency Stability		±30 ppm / ±50 ppm	
Operating Temperature Range		-20°C to +70°C, -40°C to +85°C option	
Storage Temperature Range		-40°C to +85°C	
Supply Voltage (V _{DD})		5.0V DC ±10%	3.3V DC ±10%
External Control Fuction / External Control Voltage		±100 ppm min. +2.5V ±2.0V DC	±100 ppm min. +1.65V ±1.35V DC
Supply Current	F ≤ 20 MHz	15 mA max.	10 mA max.
	20 ~ 30 MHz	20 mA max.	15 mA max.
	> 30 MHz	25 mA max.	20 mA max.
	> 40 MHz	20 mA max.	25 mA max.
Output Load		15 pF, CMOS	
Output Voltage	V _{OH}	90% V _{DD} min.	
	V _{OL}	10% V _{DD} max.	
Rise Time	10% V _{DD} ~ 90% V _{DD}	6 ns max.	
	Fall Time	6 ns max.	
Output Symmetry		45 ~ 55% at 1/2 V _{DD}	
Phase Noise		-135dBc/Hz max. at 1kHz	
Tri-State Function		---	Pin 2: N.C. or H = output enable Pin 2: L = Hi-Z output disable

Dimensions (Units: mm)

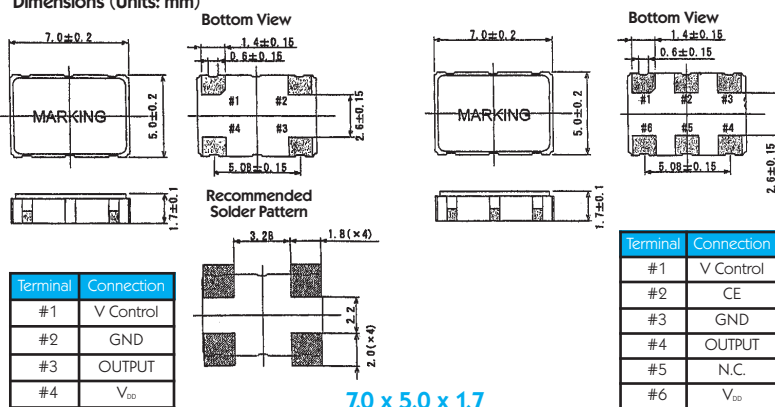

*Crystals...
and more*

Now available

RoHS
COMPLIANT
2002/95/EC



digital electronic
siegfried lehrer gmbh
Rudolf-Wanzl-Str. 3+5
D-89340 Leipzig / Germany
www.digitallehrer.de
digital@digitallehrer.de

Telefon +49 (0) 82 21 / 7 08 - 0 • Telefax +49 (0) 82 21 / 7 08 - 80

All specifications subject to change without notice.