

# PRODUKT-INFO

## VXO-61 • VXO-63

Voltage Controlled Crystal Oscillators

### FEATURES

1. 14 Pin full size.
2. Industry standard.
3. Wide frequency range.
4. Low cost.
5. Resistance weld package.
6. 5.0V and 3.3V available.

### APPLICATION

Phase locked loops, phase shift keying, in telecommunication applications as ADSL, cable modem etc.




Actual Size

ELECTRICAL SPECIFICATIONS			
Model	Condition	VXO-61	VXO-63
Frequency Range		1.0 MHz ~ 100.0 MHz	
Frequency Stability	All Conditions*	±15 ppm	
Temperature Stability	over $T_{OPR}$	±15 ppm / ±25 ppm / ±50 ppm	
Stability vs Power Change	$V_{DD} \pm 5\%$	±5 ppm	
Stability vs Load Change	15 pF ±10%	±3 ppm	
Pullability	Over Control Voltage Range	±50, ±100, ±200 ppm	±50, ±100, ±150 ppm
Control Voltage Range		0.5V ~ 4.5V	0V ~ 3.3V
Operating Temperature Range		0°C to +70°C, -40°C to +85°C option	
Storage Temperature Range		-55°C to +125°C	
Supply Voltage		5.0V ±5%	3.3V ±5%
Supply Current	1.0 MHz ~ 39.999 MHz	25 mA max.	20 mA max.
	40.0 MHz ~ 100.0 MHz	35 mA max.	30 mA max.
Output Symmetry	at 1/2 $V_{DD}$	40% ~ 60%, 45% ~ 55% option	
Rise Time	20% $V_{DD}$ ~ 80% $V_{DD}$	8 ns max.	10 ns max.
Fall Time	80% $V_{DD}$ ~ 20% $V_{DD}$	8 ns max.	10 ns max.
Output Voltage	$V_{OH}$ $V_{OL}$	90% $V_{DD}$ min. 10% $V_{DD}$ max	
Output Load		15pF max.	
Start Time		10 ms max.	
Aging first year	at +25°C ±3°C	±5 ppm / year max.	

### OPTIONS: for frequency over 40.0 MHz, please consult us.


\* Include: 25°C tolerance, operating temperature range, input voltage change, aging, load change, shock and vibration.

Terminal	Connection
#1	$V_{Control}$
#7	GND
#8	OUTPUT
#14	$V_{DD}$

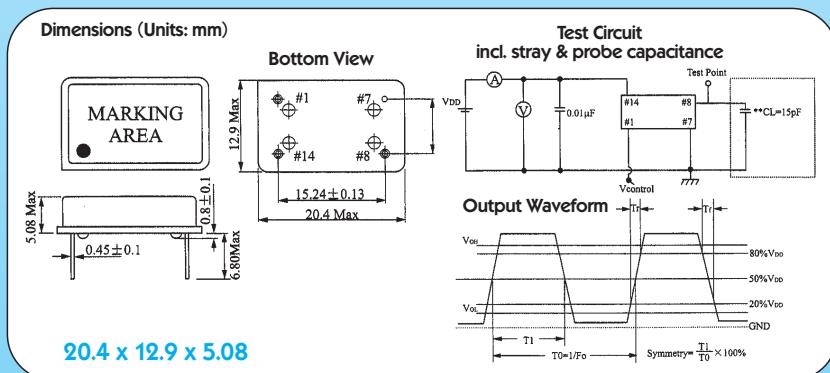

Crystals...  
and more

Now available

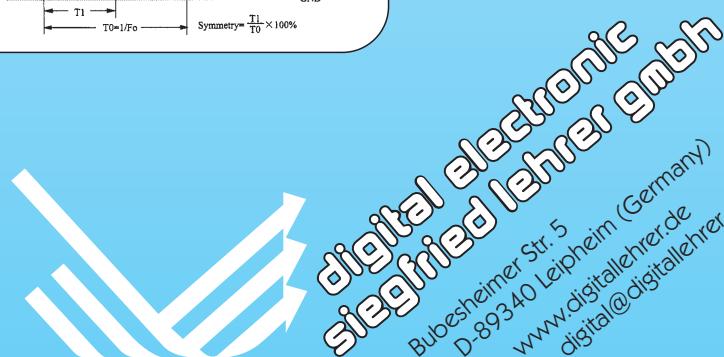

Bubesheimer Str. 5  
D-89340 Leipheim (Germany)  
www.digitallehrer.de  
digital@digitallehrer.de

Telefon +49 (0) 82 21 / 7 08 - 0 · Telefax +49 (0) 82 21 / 7 08 - 80

All specifications subject to change without notice.