




DS-235 SERIES

Rating: 0.3A 30V DC

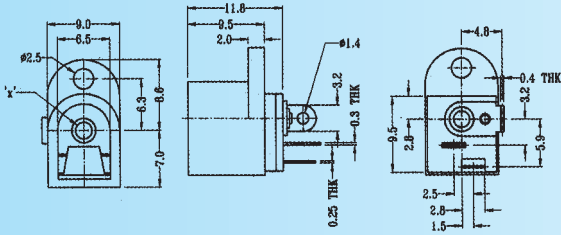



DIA.OF PIN`X` A=2.5 mm
DIA.OF PIN`X` B=2.0 mm
DIA.OF PIN`X` C=2.35 mm




DS-236B SERIES

(PHENOLIC RESIN TERMINAL BASE)

Rating: 0.3A 30V DC


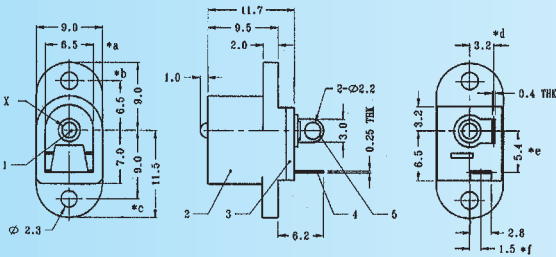


DIA.OF PIN`X` A=2.5 mm
DIA.OF PIN`X` B=2.0 mm
DIA.OF PIN`X` C=2.35 mm




DS-241 SERIES

Rating: 0.3A 30V DC


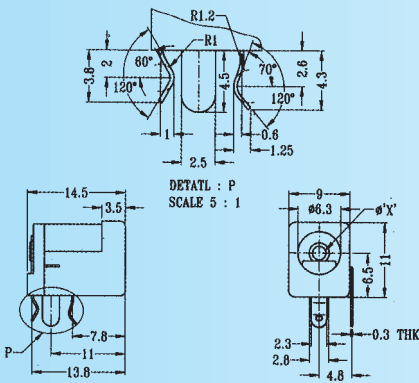


DIA.OF PIN`X` A=2.5 mm
DIA.OF PIN`X` B=2.0 mm




DS-242 SERIES

Rating: 0.3A 30V DC


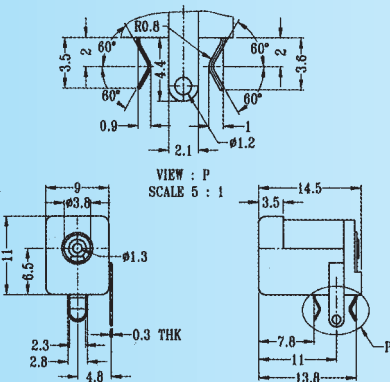


DIA.OF PIN`X` D=1.3 mm



DS-243 SERIES

Rating: 0.3A 30V DC

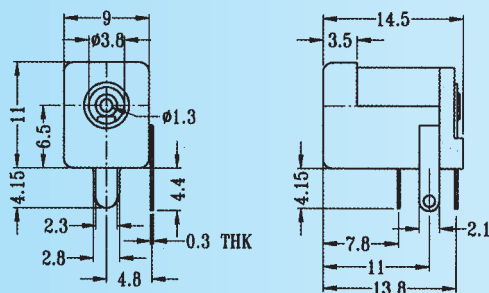

DIA.OF PIN`X` A=1.3 mm

