TACT SWITCH

DSL

TD-12EA (with embossing)
TD-12XA (without embossing)
series

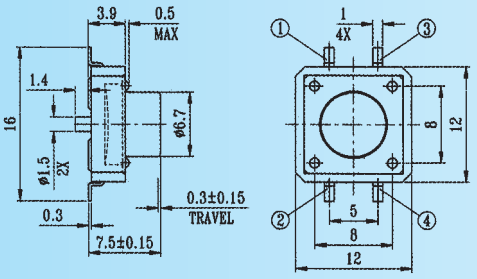



COVER TYPE	CODE	CODE	Operating Force, gf
PLASTIC	A01	X	160
METAL	A00	Z	250

1. RATING: DC 12V 50mA
2. TRAVEL: 0.3 ± 0.15 mm
3. CONTACT RESISTANCE 100mΩ MAX
4. LIFE: 100,000 cycles min
5. OPERATING FORCE 160±50 gf

CIRCUIT DIAGRAM



TD-12EB (with embossing)
TD-12XB (without embossing)
series

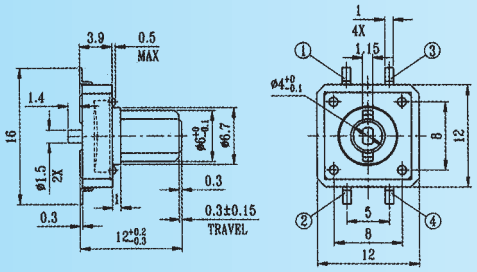



COVER TYPE	CODE	CODE	Operating Force, gf
PLASTIC	A01	X	160
METAL	A00	Z	250

1. RATING: DC 12V 50mA
2. TRAVEL: 0.3 ± 0.15 mm
3. CONTACT RESISTANCE 100mΩ MAX
4. LIFE: 100,000 cycles min
5. OPERATING FORCE 160±50 gf

CIRCUIT DIAGRAM



TD-12EC series
TD-12XC series

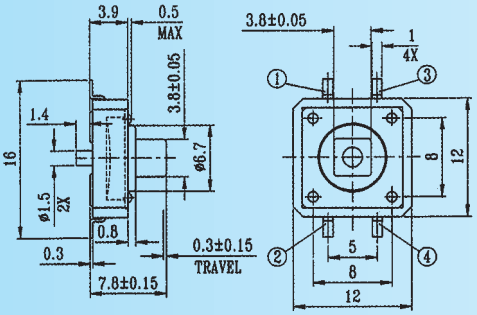



MODEL	GUIDE PIN	TAPE & REEL OPTION
TD-12EC	With	No
TD-12XC	Without	No

COVER TYPE	CODE	CODE	Operating Force, gf
PLASTIC	A01	X	160±50
METAL	A00	Z	250±100

1. RATING: DC 12V 50mA
2. TRAVEL: 0.3 ± 0.15 mm
3. CONTACT RESISTANCE 100mΩ MAX
4. OPERATING FORCE 160±50 gf

CIRCUIT DIAGRAM



TD-12ED series
TD-12XD series

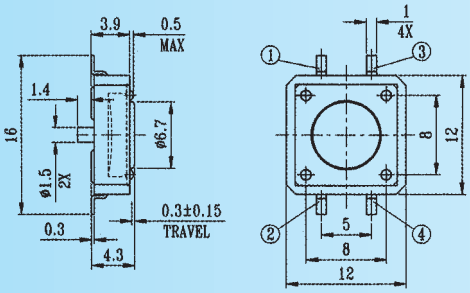



MODEL	GUIDE PIN	TAPE & REEL OPTION
TD-12ED	With	No
TD-12XD	Without	No

COVER TYPE	CODE	CODE	Operating Force, gf
PLASTIC	A01	X	160±50
METAL	A00	Z	250±100

1. RATING: DC 12V 50mA
2. TRAVEL: 0.3 ± 0.15 mm
3. CONTACT RESISTANCE 100mΩ MAX
4. OPERATING FORCE 160±50 gf

CIRCUIT DIAGRAM



TD-12EF series
TD-12XF series

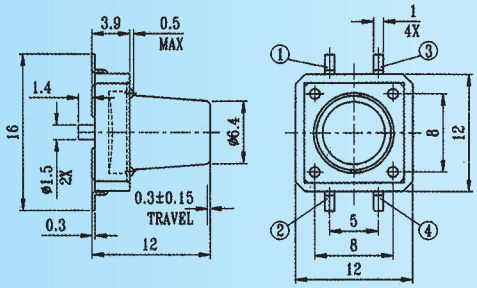



MODEL	GUIDE PIN	TAPE & REEL OPTION
TD-12EF	With	No
TD-12XF	Without	No

COVER TYPE	CODE	CODE	Operating Force, gf
PLASTIC	A01	X	160±50
METAL	A00	Z	250±100

1. RATING: DC 12V 50mA
2. TRAVEL: 0.3 ± 0.15 mm
3. CONTACT RESISTANCE 100mΩ MAX
4. LIFE: ≥100,000 cycles
5. OPERATING FORCE 160±50 gf

CIRCUIT DIAGRAM



All specifications subject to change without notice.

digital electronic siegfried lehrer gmbh
Bubesheimer Str. 5 · 89340 Leipheim, Germany
Tel. +49 (0) 8221/708-0 · Fax +49 (0) 8221/708-80
www.digitallehrer.de
digital@digitallehrer.de